KEY

1A	01		02	Traffig y gwyriad Diverted Traffic →	04	Traffig y gwyriad Diverted Traffic ↑	06	Gwyriad Diversion ←	08	FFORDD O'CH BLAEN AR GAU ROAD AHEAD CLOSED	10	Traffig y Gwyriad Diverted Traffic	12	Traffig y gwyriad Diverted Traffic	14	FFORDD O'CH BLAEN AR GAU ROAD AHEAD CLOSED ←	16	18
Ffordd Ar Gau Yma –/Month/---- Am -- Diwrnod Road Closed Here –/Month/---- for -- Days --:-- to --:--	FFORDD AR GAU ROAD CLOSED	DIWEDD y gwyriad Diversion ENDS	03	← Traffig y gwyriad Diverted Traffic	05	Gwyriad Diversion →	07	Gwyriad Diversion ↑	09	Traffig y Gwyriad Diverted Traffic	11	Traffig y Gwyrriad Diverted Traffic	13	FFORD O'CH BLAEN AR GAU MYNEDIAD I BRESWYLWYR YN UNIG ROAD AHEAD CLOSED RESIDENT ACCESS ONLY	15	FFORDD O'CH BLAEN AR GAU ROAD AHEAD CLOSED →	17	19

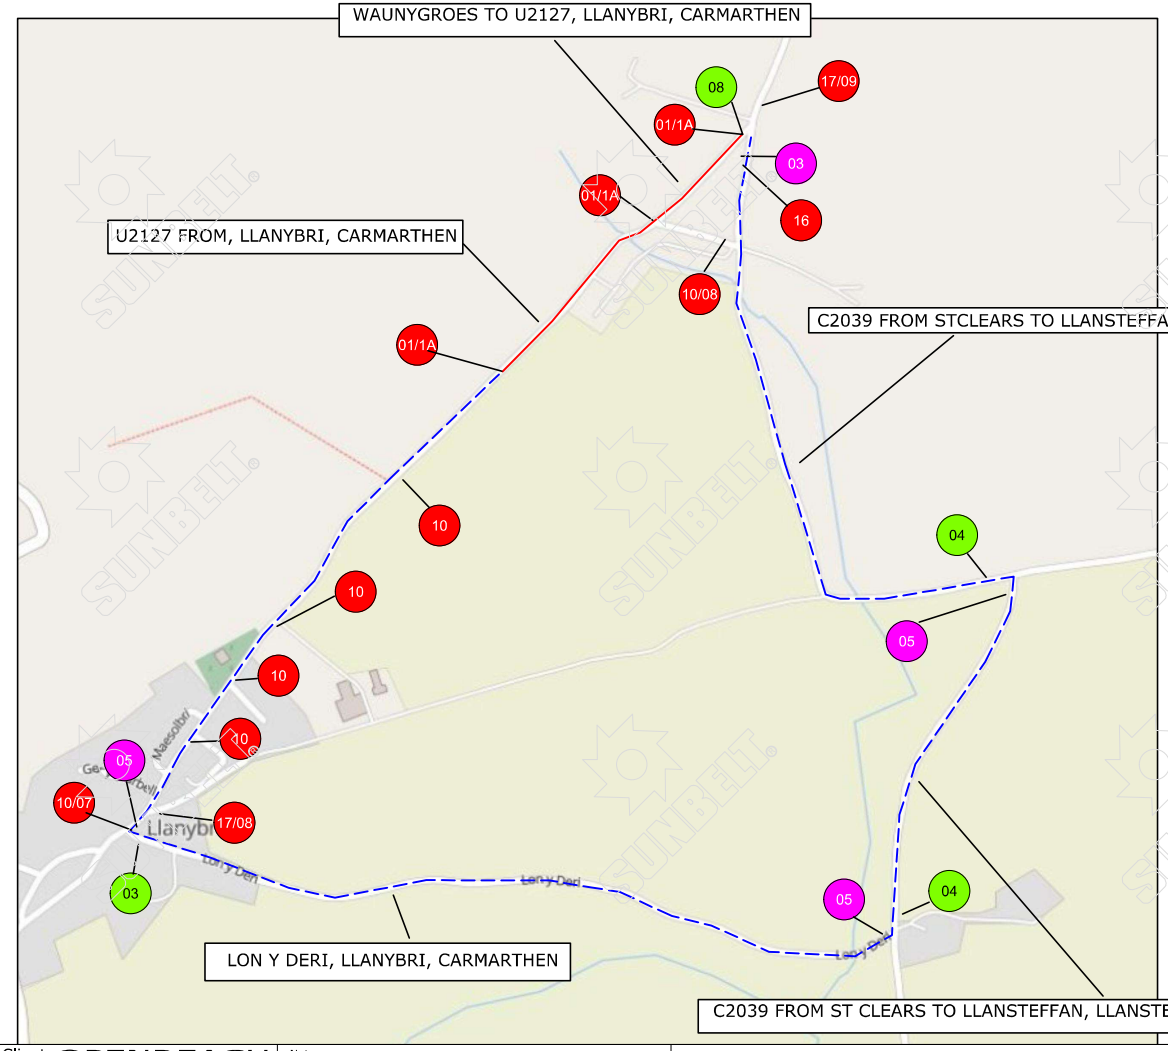

20 — XXXXXXX XXXXXXX XXXXXXX XXXXXXX

21 — XXXXXXX XXXXXXX XXXXXXX XXXXXXX

ROAD CLOSURE

DIVERSION ROUTE

03 CLOCKWISE ROUTE

03 ANTI-CLOCKWISE ROUTE

ROAD CLOSURE LENGTH	386 METRES
ROAD CLOSURE WIDTH	3 METRES

Contract No	220-S011396	Client: OPENREACH	
Date	11/03/2025	Site Location / Drawing Title	
Drawn by	BO/878	C2039 FROM STCLEARS TO	
Approved By	JB/255	LLANSTEFFAN LLANGAIN	
Purpose of works	TELECOM WORKS	CARMARTHEN	
Version Number	01		
Amended By	xxxxxxxxx		
Amendment Date	xx/xx/xxxx	Scale	NOT TO SCALE
Sheet No	3 of 3	OS Licence No	0000000000000

Note
1. All equipment shall be approved and shall comply with the Department Of Transport specification MCE0111. This drawing does not show the normal road works signage that will be required as per Chapter 8.
2. All signs to be in accordance with TSGRD 2002 and to minimum class retroflective.
3. Minimum height of lettering to be 60mm and sign boards to be 1000mm (750mm where appropriate).

The information in this drawing may not be copied or used by third parties without written consent from Sunbelt Rentals ltd (Traffic Management).
This layout is for installation by NRSWA, Lantra 12A,12B,12C,12D qualified persons.
All works shall be in accordance with Safety at Street Works and Road Works, A Code of Practice 2013 & Chapter 8

TO BE INSTALLED AT CLOSURE POINTS

THIS DOCUMENT IS UNCONTROLLED WHEN PRINTED
The electronic version of this document is the approved and most current. Any printed version is uncontrolled and may not be current.

DETAIL AL

Manned Airlock system.
Notes:
1) Minimal site traffic 25 - 30m air lock is sufficient. Extend airlock for larger work vehicle flow.
2) Red lamps to be used on Nissen Barrier (all HE networks)



SUNBELT RENTALS
Sunbelt Rentals UK (Traffic Management)
Kemble Airfield Enterprise Park,Cirencester Road, Kemble GL7 6BQ
Telephone: 0370 050 0792